

Top hung and pivot windows combined in the new **FPP preSelect**[®]



space without limits



TURN

space without limits



TWO WAYS OF OPENING


The new FAKRO roof windows ensure the highest comfort levels when converting the attic space. FPP preSelect is both a top hung and pivot window and is part of a new generation which has two separate ways of opening the sash. The outward opening function enables the sash to be opened in any position from 0° to 35°, which allows the occupier to approach easily and provide an unlimited view. The pivot function allows you to install and operate the external awning blind, ventilate the room and easily clean the outside glass from the inside.

The newly patented operating mechanism guarantees complete sash stability, both in top hung and pivot positions. To change the opening method use the preSelect sliding switch on the frame, accessible when the window is open.

10 YEARS GUARANTEE

Effective air inlet V35

Effective air inlet V35 ensures a constant inflow of fresh air even when the window is closed. The air inlet can be adjusted to regulate the amount of air coming into a room.

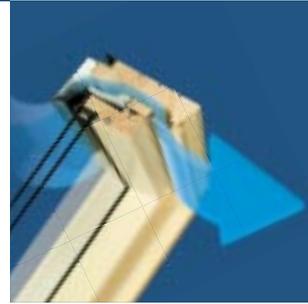

Wood of the highest quality

Specially selected pinewood of the highest quality, double vacuum preservative treated and finished with three coats of acrylic lacquer to ensure long durability of wooden elements of the window.



“Warm” and safe glazing unit

The interior pane with a low emission coat guarantees excellent thermoinsulating parameters. The exterior toughened pane guarantees security even during heavy rain or hailstorms. The toughened glass is covered by a lifetime warranty against hailstone damage.



New design of external profiles

Aluminium profiles covering the window are pressed which improves the attractiveness of the window. The rounded profiles are the first insert of a new pattern-designing line of profiles in Fakro roof windows.



Universal Fakro System

The FPP window has been designed to be compatible with existing FAKRO systems. Choosing preSelect windows, allows all existing flashings and a wide range of accessories currently in use with the FAKRO centre pivot window to be used.



preSelect[®]
new generation roof windows




Fakro GB Ltd
Fakro House
Astron Business Park Hearthcote Road
Swadlincote DE11 9DW
Telephone: 01283 554755
Fax: 01283 224545
www.fakro.com
e-mail: sales@fakrogb.com

TECHNICAL SPECIFICATION

of top hung and pivot windows

FPP preSelect®

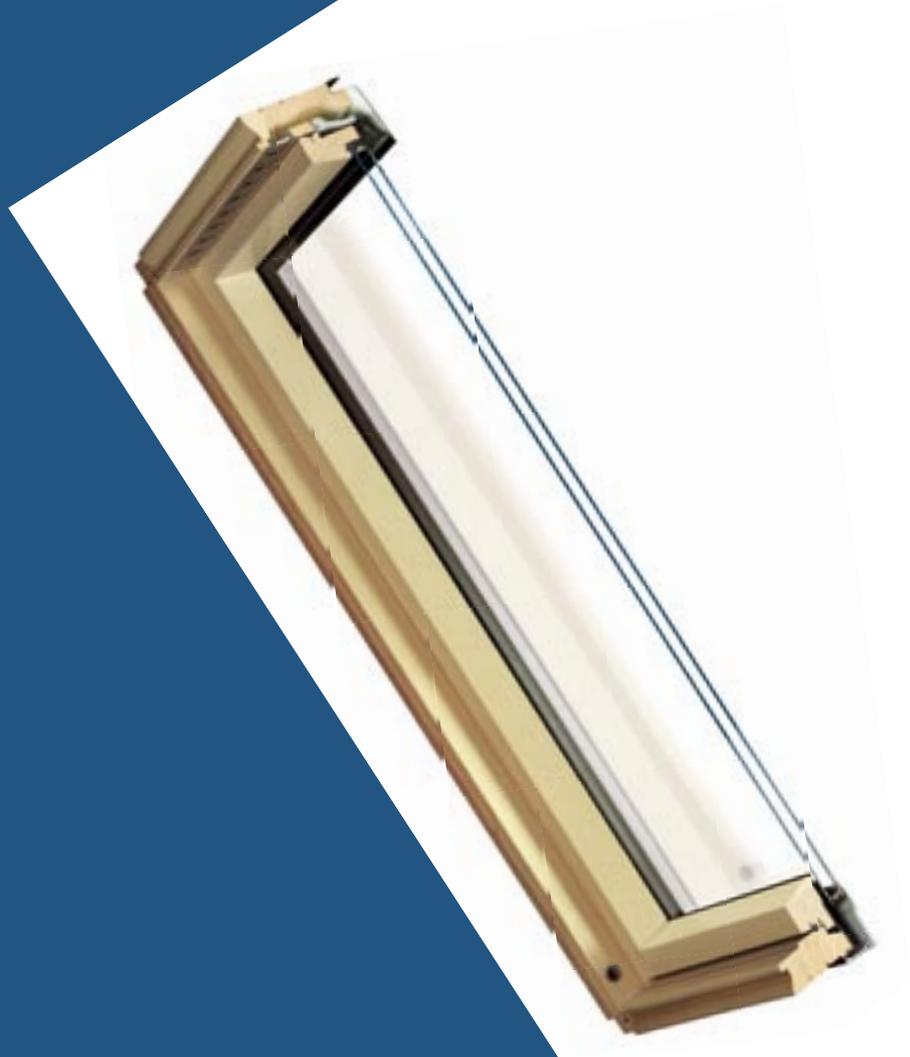

— window U-value:	1.5 W/m ² K
— glazing U-value:	1.1 W/m ² K
— Rw coefficient :	32 dB
— glazing:	4H-16-4T
— low emission coating:	+
— inert gass filled panes:	+
— toughened glass:	+
— air inlet type:	V35
— air inlet air flow:	35 m ³ /h
— varnishing:	three
— seals:	three
— multi-point opening:	+
— handle:	Elegant

SET AJAR  

space without limits



Top hung and pivot windows combined in the new **FPP preSelect®**

